Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/EP05/001991

International filing date: 23 February 2005 (23.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: US

Number: 60/548,987


Filing date: 01 March 2004 (01.03.2004)

Date of receipt at the International Bureau: 29 March 2005 (29.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in

compliance with Rule 17.1(a) or (b)



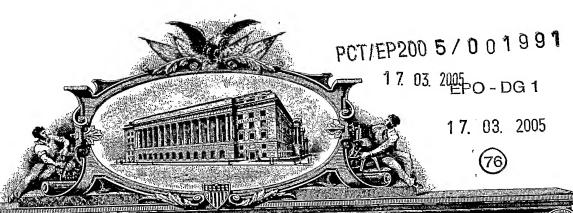

THE UNITED STAYIES OF AMBRICA

TO ARETO WHOM THUSTE PRESENTS SHAME COMES

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

March 03, 2005

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/548,987

FILING DATE: March 01, 2004

By Authority of the

COMMISSIONER OF PATENTS AND TRADEMARKS

P. SWAIN

Certifying Officer

af Iha

PTO/SB/16 (01-04)

Docket Number: ACA3038PRUS1

Approved for use through 07/31/2006. OMB 0651-0032

Approved for use through 07/31/2006. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number. PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No. EM 122071908 US INVENTOR(S) Residence Family Name or Sumame (City and either State or Foreign Country) Given Name (first and middle [if any]) Seabrook, Texas Rosini ⊖len P. separately numbered sheets attached hereto Additional inventors are being named on the TITLE OF THE INVENTION (500 characters max) POLYMERIZATION INITIATOR SYSTEMS CONTAINING ALUMINUM COMPOUNDS AS CURING INHIBITORS AND POLYM CORRESPONDENCE ADDRESS Direct all correspondence to: Customer Number: OR Akzo Nobel Inc. - Richard P.Fennelly Individual Name Intellectual Property Department Address Address 7 Livingstone Avenue 10522-3408 Zip State New York City Dobbs Ferry Fax (914) 693-4236 Telephone Country U.S.A. ENCLOSED APPLICATION PARTS (check all that apply) CD(s), Number Specification Number of Pages 7 Other (specify) Drawing(s) Number of Sheets Application Data Sheet. See 37 CFR 1.76 METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT **FILING FEE** Applicant claims small entity status. See 37 CFR 1.27. Amount (\$) A check or money order is enclosed to cover the filing fees. 160.00 The Director is herby authorized to charge filing fees or credit any overpayment to Deposit Account Number: 01-1350 Payment by credit card. Form PTO-2038 is attached. The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government. No. Yes, the name of the U.S. Government agency and the Government contract number are: [Page 1 of 2] Date March 1, 2004 Respectfully submitted, REGISTRATION NO. 25,677 SIGNATURE_ (if appropriate)

TYPED or PRINTED NAME Richard P. Fennelly

TELEPHONE (914) 674-5464

This collection of information is required by 37 CFR 1.51. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Mail Stor Provisional Application. Commissioner for Patents P.O. Box 1450, Alexandria VA 22313-1450. ADDRESS. SEND TO: Mail Stop Provisional Application, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

the IFW Image Database on 02/25/2005

POLYMERIZATION INITIATOR SYSTEMS CONTAINING ALUMINUM COMPOUNDS AS CURING INHIBITORS AND POLYMERIZABLE COMPOSITIONS MADE THEREWITH

Background of the Invention

5

10

15

20

25

30

The present invention relates to a novel curing inhibitor for amine organoborane complex polymerization initiators of the type decribed and claimed in U.S. Patent Application Publication No. 2002/0058764, the references described therein to Mottus et al., Skoultchi, Zharov et al., and Pocius, in the following related U.S. Patent Application Publication Nos. 2002/0025381, 2002/0028894, 2002/0031607, 2002/0033227, and 2003/0120005, and in the original U.S. Patent Application No. 09/466,321. these patent applications and patents are incorporated herein by reference as covering the amine organoborane complex polymerization initiators that are useful in the practice of the present invention. As stated in at in paragraphs 0002 and 0009 of U.S. Patent Application Publication No. 2002/0058764, it is desired to have polymerization initiator systems that have enhanced stability in the presence of compounds having olefinic unsaturation, thus improving the ability to cure on demand.

Summary of the Invention

One embodiment of the present invention is a composition comprising an organoborane/amine complex and an effective amount of an aluminum compound to inhibit curing of the organoborane/amine complex when used as part of a polymerization initiator system containing one or more monomers, oligomers or polymers having olefinic unsaturation. Paragraph 0010 of U.S. Patent Application Publication No. 2002/0058764 provides a non-limiting but representative description of organoborane and amine components that can be selected for use. The embodiments listed

in paragraphs 0011 and 0012 of this same patent publication are relevant to the use of this composition, and the statements made in paragraph 0013 regarding the characteristics of the composition also hold true for the composition of the present invention.

Description of Preferred Embodiments

5

10

15

20

25

30

Paragraph 0014 and the first seven lines of paragraph 0015 of U.S. Patent Application Publication No. 2002/0058764 describe the organoborane used in the complex while paragraphs 0017 to 0044 also describe certain amines that can be selected for use in the practive of the present invention. Other amines can also be used (for example, as described in U.S. Patent No. 5,935,711 in Cols. 5 to 8).

A variety of organoaluminum compounds of the formula Al_2R_6 can be selected for use in the present invention. preceding formula R is either $C_1\text{--}C_{12}$ alkyl or $C_1\text{--}C_{12}$ alkoxy, with each of the six R groups being the same or different. extension, this formula also represents compounds explicitly designated as AlR_3 and $Al(R)(R'_2)$ for compounds of the formula with even numbers of alkyl and/or alkoxy groups. The R groups can be a mixture of about three alkyl groups and about three alkoxy groups. The terms "alkyl" and "alkoxy" as used herein includes both straight-chain and branched-chain groups.

Non-limiting examples of organoaluminum compounds within the scope of this invention include trimethylaluminum, triethylaluminum, tri-n-propylaluminum, tri-n-butylaluminum, triisobutylaluminum, tri-n-hexylaluminum, tri-n-octylaluminum, aluminum triethoxide, aluminum isopropoxide, aluminum tri-sbutoxide, aluminum tri-t-butoxide, diethylaluminum ethoxide,

diisobutylaluminum ethoxide, triethyl(tri-s-butoxy)dialuminum, tri-n-butyl(triisopropoxy)dialuminum, and mixtures thereof.

The organoaluminum compound can either be added directly to the organoborane prior to reaction with amine to prepare the organoborane/amine complex or it can be added directly to the preprepared organoborane/amine complex.

The molar ratio of boron to aluminum in the composition is relatively important. If the molar ratio of boron to aluminum is too high, then the polymerizable composition made therewith may experience an undesirable increase in viscosity. If the molar ratio of boron to aluminum is too low, the composition may be pyrophoric (the absolute ratio at which the composition is pyrophoric is dependent upon the organoaluminum compound that is used) or there may be problems with adhesion. The molar ratio of boron to aluminum can range from about 1.0:1.0 to about 50.0:1.0. Within this described range, for example, the molar ratio of boron to aluminum can range from about 10.0:1.0 to about 30.0:1.0.

U.S. Patent Application Publication No. 2002/0058764
describes the organoborane/amine complex (at paragraph 0045), the
polymerizable compounds and compositions (at Paragraphs 0046 to
0048), the preparation and properties of the organoborane/amine
complex (at paragraphs 0049 to 0051) and the applications of the
polymerizable compositions (at paragraphs 0052 to 0071 and 0073
to 0075). Paragraphs 0072 and 0084 of this same patent
publication describe one method to test the thermal stability of
the polymerizable composition, and paragraph 0085 describes a
method used to test the thermal stability of such compositions.

10

20

25

Examples

The compositions tested contained 15 parts by weight of the organoborane/amine complex (with or without aluminum containing dopant) mixed with 70 parts by weight of an acrylic resin (comprised of 79 % methylmethacrylate, MMA, and 21 % of polymethylmethacrylate, PMMA, of 270 K Mw), 8 parts by weight of a polyoxyalkyleneamine (Jeffamine T403), 7 parts by weight of a Core-shell impact modifier (Paraloid EXL2691A) and 0.03 % by weight of an antioxidant (2,6-ditertbutyl-4-methyl phenol, BHT). After the batches were properly mixed, they were placed in 8 oz. 10 jars. The initial viscosity was measured with a Brookfield Digital Viscometer HATDV II, spindle #7 at 20 rpm. The jars were than placed in an oven set at 40°C, for the number of days indicated in the data. On the day that the viscosity was measured the samples were taken out of the oven and allowed to 15 cool to room temperature, usually 4-6 hours. After the viscosity was measured, the samples were placed back in the oven. procedure was repeated until the samples gelled.

				_	_		_	_	_	_		
מ לשת	Under	ססד קקיין	KCFS	2.5		9. 80		16.5	3	\ \ \		
	Pyrophoric					No		No		No		
	Molar B:Al Ratio				1		83.5		41.2		1	
	Molar	N:B	Ratio		7.3T		1.32	Ľ	T . 34	1 20		
		,	שטייויסט רא	AL SOUP	None		np., Al. (Oi Pr.)	C / C Tuend	$ {}^{\mathrm{n}}R_{11},A_{1},(OiPr)_{3} $	7	"Bu-Al, (O1Pr) 3	
				Amine	KU ().	MOFA	8400	MOFA	MODA.	MOFR	MODA	FIVES
				Borane		TABB		TABB	6	TNBB	COLOR	TNBB
				Evample	1	-		2		ന		7

What is Claimed:

- 1. A composition comprising an organoborane/amine complex and an effective amount of at least one organoaluminum compound to inhibit curing of the organoborane/amine complex when used as part of a polymerization initiator system containing olefinic unsaturation.
- 2. A composition as claimed in Claim 1 wherein the organoaluminum compound is of the formula Al_2R_6 , with R being selected from the group consisting of C_1 - C_{12} alkyl and C_1 - C_{12} alkoxy and with each of the six R groups being the same or different.
- 15 3. A composition as claimed in either Claim 1 or Claim 2 having a molar ratio of boron to aluminum of from about 1.0:1.0 to about 50.0:1.0.
- 4. A composition as claimed in either Claim 1 or Claim 2

 20 having a molar ratio of boron to aluminum of from about 10.0:1.0

 to about 30.0:1.0.
- 5. A composition as claimed in any Claims 1 to 4 wherein the organoaluminum compound is one or more of trimethylaluminum, triethylaluminum, tri-n-propylaluminum, tri-n-butylaluminum, triisobutylaluminum, tri-n-hexylaluminum, tri-n-octylaluminum, aluminum triethoxide, aluminum isopropoxide, aluminum tri-s-butoxide, aluminum tri-t-butoxide, diethylaluminum ethoxide, diisobutylaluminum ethoxide, triethyl(tri-s-butoxy)dialuminum, tri-n-butyl(triisopropoxy)dialuminum.

- 6. A composition as claimed in any Claims 1 to 5 wherein the organoaluminum compound was added to an organoborane prior to reaction with amine in preparing the organoborane/amine complex.
- 7. A composition as claimed in any Claims 1 to 5 wherein the organoaluminum compound was added to a preprepared organoborane/amine complex.
- 8. A polymerizable composition comprising one or more monomers, oligomers or polymers having olefinic unsaturation and, as the initiator system, the composition of any of Claims 1 to 7.